

2500W Modified Sine Wave DC - AC Power Inverter

Inverter Expert **CAR Series - CAR2.5K**



FEATURES: ■

I/P voltage: 12V DC or 24V DC or 48V DC ◀

Output voltage: 100/110/120V AC or 220/230/240V AC ◀

Output frequency: 50/60Hz ±3 ◀

I/P protections: Bat.Low alarm; Bat.Low shutdown; Over voltage; Polarity reverse ◀

O/P protections: Over load; Short circuit; Earth fault; Over temperature; Soft start ◀

Output waveform: Modified Sine Wave ◀

Design: High frequency design ◀

Topology: Microprocessor ◀

No load current draw: Low power consumption (standby) ◀

In front panel: With power ON/OFF switch and LED indicator ◀

ON/OFF remote control: optional ◀

Cooling fan: Load controlled or temperature controlled cooling fan (optional) ◀

Output Receptacle (optional)



■ SPECIFICATION:


Model	CAR2.5K-121	CAR2.5K-122	CAR2.5K-241	CAR2.5K-242	CAR2.5K-481	CAR2.5K-482	
Output	AC Voltage	110V	230V	110V	230V	110V	230V
	AC Voltage Range	100~120V AC	220~240V AC	100~120V AC	220~240V AC	100~120V AC	220~240V AC
	AC Regulation	± 10%					
	Rated Power	2500W					
	Peak Power	5000W(few seconds)					
	Waveform	Modified Sine Wave					
	Frequency	50/60Hz ± 3					
	USB Port	5V 2.1A					
	LED Indicator	Green for power on, Red for power failure / protection status					
Cooling fan	Control by load						
Input	DC Current	250A		125A		65A	
	No Load Current Draw	1.1A		1.1A		1.1A	
	DC Voltage	12V		24V		48V	
	Voltage Range	9.5~16V DC		19~32V DC		38~64V DC	
	DC Connector	BVR16 battery clip * 2ea		BVR16 battery clip * 1ea		BVR10 battery clip * 1ea	
Protection	Efficiency	≥90%					
	Low Voltage Alarm	11 ± 0.5V DC		22 ± 1V DC		44 ± 1V DC	
	Low Voltage Shutdown	9.5 ± 0.5V DC		19 ± 1V DC		38 ± 1V DC	
	Reset Voltage after L. V. S	11.5V~12V DC		23~24V DC		46~48V DC	
	Overload	Shut off o/p, re-power to recover					
	Over Voltage	15 ± 0.5V DC		30 ± 1V DC		60 ± 2V DC	
	Over Temperature	45 ± 5°C/113 ± 9 °F					
	Output Short-circuit	Shut off o/p, when output is short circuit					
	Reverse Polarity	By fuse open					
	Replaceable Fuse	30A*10		15A*10		7.5A*10	
	Soft Start	Yes, 3~5's					
Earth Fault	Shut off o/p when the load has electric leakage						
Environment	Working Temp.	0~30°C @ 100% load; 40°C @50% load					
	Working Humidity	20%~90% RH non-condensing					
	Storage Temp., Humidity	-30~+70°C/-22~+158°F, 10~95%RH					
	Temp. Coefficient	± 0.05%(0~50°C)					
Safety&EMC	Isolation Resistance	I/P-O/P:100M Ohms/500VDC/25°C/70%RH					
	EMI Conduction&Radiation	Compliance to EN55022 class B, 72/245/CEE, 95/54/CE					
	EMS Immunity	Compliance to EN61000-4-2,3					
	LVD	Compliance to EN60950					
	E-mark	E8 10R-02 0633					
Other	Remote Control	optional(switch with 5m wire)					
	MTBF	37khrs min. MIL - HDBK - 217(25°C)					
	N.W/unit	5300g					
	Dimension(cm)	34.5*23*10.8(L*W*H)					
	Packing	Blister card/gift box, 2 units/13.4Kg/Ctn(41*31*38cm)					
	Output Receptacle	A, B, C, D, E, F, G, H, I, J, K, L, M, N(optional)					
	Applications	Home appliance, power tools, office and portable equipment and vehicle...etc.					

2500W Modified Sine Wave DC - AC Power Inverter

Inverter Expert **CAR Series - CAR2.5K**

MECHANICAL SPECIFICATION:

Unit: mm

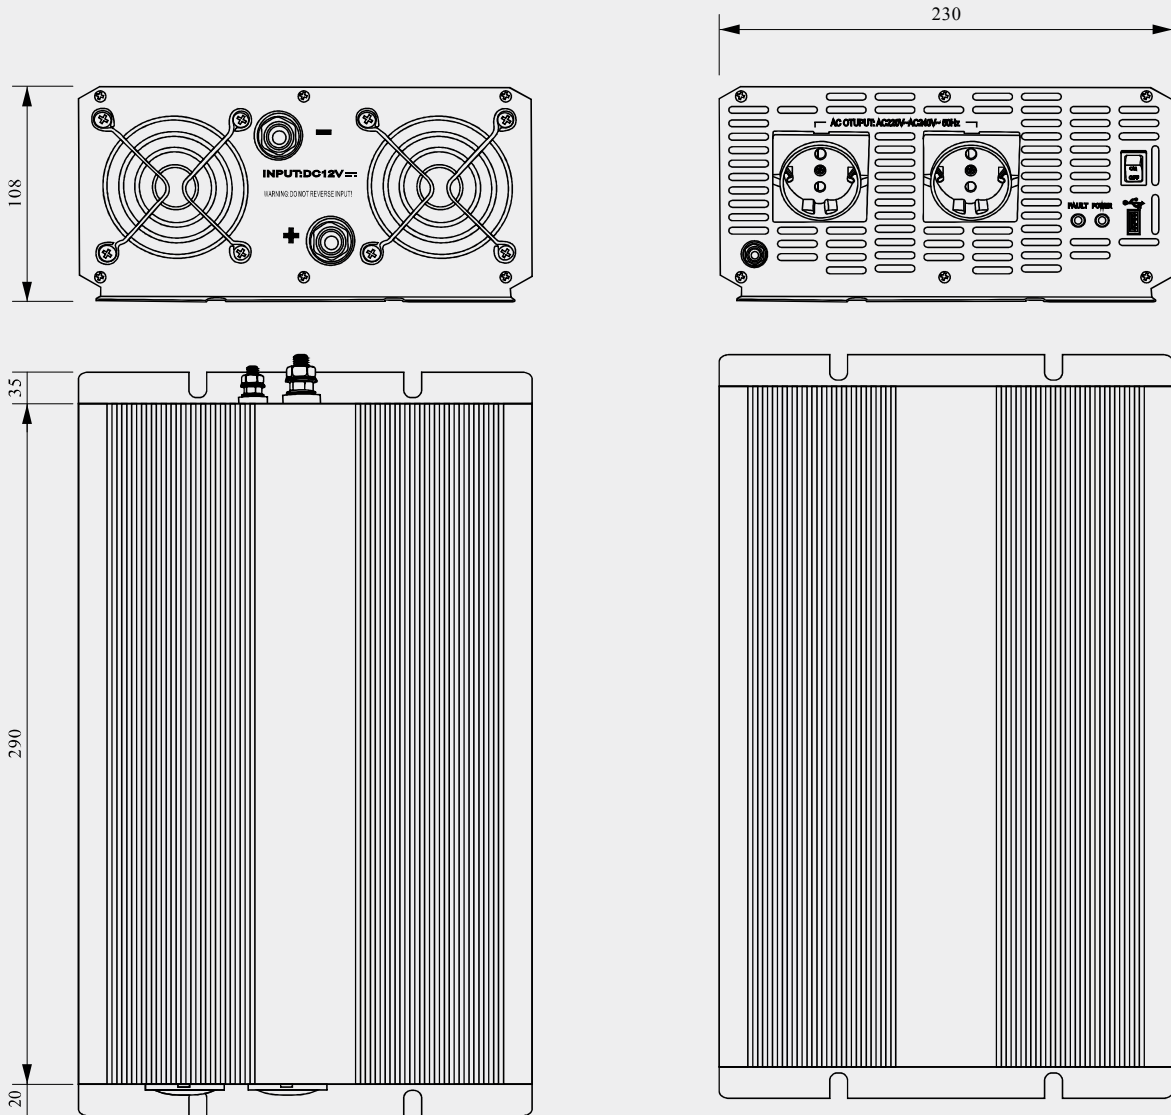

Output Receptacle (optional)

